Contents | Reference index | Request a quotation

PROFESSIONAL SELECTION 2027 / 2028

Cardin

Gate operators and radio control



CARHF4G1V



SLW824CB



BLGRIFFE24M

Control Access Distribution

31 selected references and configurations for the European market.

Clickable contents, manufacturer resources and quotation links.

Choose a product family | Plan my project

Contents | Reference index | Request a quotation

Contents

Choose by installation p. 3
Reference index p. 4
Access control and 4G receivers p. 5
Sliding gates p. 9
Swing gates and kits p. 14
Up-and-over and sectional doors p. 20
Rising barriers p. 25
Radio, control and safety p. 28
Technical guidance p. 36
Prepare a quotation and view sources p. 37

Control Access Distribution

Each line opens its chapter. The Contents button remains available on every page.

Contents | Reference index | Request a quotation

Choose by installation

31 illustrated sheets for access control, automation and safety. Indicative price excl. VAT for CARHF4G1V. Other references on request.

Control Access Distribution

Access control and 4G receivers

View product sheets

Sliding gates

View product sheets

Swing gates and kits

View product sheets

Up-and-over and sectional doors

View product sheets

Rising barriers

View product sheets

Radio, control and safety

View product sheets

Contents | Reference index | Request a quotation

Reference index

BLGRIFFE24M	p. 14	GLZACK600	p. 22
BLGRIFFE24S	p. 18	HLXCORE230	p. 17
BLGRIFFE24TM	p. 15	HLXCORE24	p. 19
CARHF4G	p. 6	KT-BLGRIFFE24	p. 16
CARHF4G-10	p. 7	KT-VELARIS624-2	p. 13
CARHF4G1V	p. 5	SAFEPRC4	p. 30
CDR-REDS2.0	p. 34	SLW1524CB	p. 10
CDR-REDSL2.0	p. 35	SLW824CB	p. 9
DKS1000T	p. 8	SLX1224REV	p. 11
ELDOML	p. 26	SLX24DRACO/2	p. 12
ELDOMS	p. 25	TXQ44940M	p. 29
ELSNAPS	p. 27	TXQ504C4	p. 28
GLMECHA230M	p. 21	TXWALL500MFB	p. 32
GLMECHA24M	p. 20	TXWALL500MFL	p. 33
GLMECHA24S	p. 24	UNICO500MF	p. 31
GLZACK1000	p. 23		

Click an ordering reference to open its product sheet.

Control Access Distribution

Contents | Reference index | Request a quotation

Access control and 4G receivers

Cardin / CARHF4G1V

Proposed configuration · 4G receiver



Manufacturer range image · confirm version

CAD-CAR-0001 commercial configuration for remote access management, with S504 radio and the MyCardin platform.

- Up to 5,000 access credentials stated
- One physical relay and one transistor output stated
- 12 V power supply ordered separately

Control Access Distribution

Commercial configuration code. Cardin links describe the CARHF4G family. Confirm the version, SIM terms and services in the quotation.

Control Access product sheet

€508.20 excl. VAT

Indicative CAD public price · 03.11.2026. Contact us.

Manufacturer catalogue FR | Manufacturer catalogue EN | CAD PDF sheet | Request a quotation

Contents | Reference index | Request a quotation

Access control and 4G receivers

Cardin / CARHF4G

Cardin 4G access control receiver



Manufacturer range image · confirm version

Remote management of access rights and schedules in MyCardin for residential, commercial and industrial sites.

- Free choice of mobile operator
- 433 MHz radio · 1,000 user-code capacity stated
- 12 V DC · IP55 enclosure · up to four outputs

Check local mobile coverage and SIM terms.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Control Access Distribution

Contents | Reference index | Request a quotation

Access control and 4G receivers

Cardin / CARHF4G-10

Cardin 4G access control receiver



Manufacturer range image · confirm version

Remote management of access rights and schedules in MyCardin for residential, commercial and industrial sites.

- 10-year prepaid SIM for data updates
- 433 MHz radio · 1,000 user-code capacity stated
- 12 V DC · IP55 enclosure · up to four outputs

Check local mobile coverage and SIM terms.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Control Access Distribution

Contents | Reference index | Request a quotation

Access control and 4G receivers

Cardin / DKS1000T

Wired backlit keypad



Cardin image · DKS1000T

Surface-mounted metal keypad for the DKS access control system or compatible equipment.

- 12 keys including 10 number keys
- IP57 · backlit keys
- DKS connection via shielded conductor

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sliding gates

Cardin / SLW824CB

SLW 824 sliding gate operator



Manufacturer range image · confirm version

Sliding gate operator with integrated control. Verify gate configuration and protective devices.

- 230 V AC mains · 24 V DC motor
- Drive speed 13 m/min
- IP44 · 70% duty cycle

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sliding gates

Cardin / SLW1524CB

SLW 1524 sliding gate operator



Manufacturer range image · confirm version

Sliding gate operator with integrated control. Verify gate configuration and protective devices.

- 230 V AC mains · 24 V DC motor
- Drive speed 9.5 m/min
- IP44 · 70% duty cycle

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sliding gates

Cardin / SLX1224REV

Reversible SLX sliding gate operator



Cardin image · SLX1224REV

Sliding gate operator with integrated control. Verify gate configuration and protective devices.

- 230 V AC mains · 24 V DC motor
- Drive speed 17 m/min
- IP44 · 70% duty cycle

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sliding gates

Cardin / SLX24DRACO/2

High-speed DRACO sliding gate operator



Cardin image · SLX24DRACO/2

Sliding gate operator with integrated control. Verify gate configuration and protective devices.

- 230 V AC mains · 24 V DC motor
- Drive speed 30 / 22 m/min
- IP44 · 50% duty cycle

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sliding gates

Cardin / KT-VELARIS624-2

VELARIS 600 kg sliding gate kit



Manufacturer range image · confirm version

Residential kit with VELARIS624 operator, radio controls and specified kit accessories.

- Gate up to 600 kg
- 24 V DC motor with encoder
- 4-channel remotes · 433 MHz FM receiver

Control Access Distribution

The image shows the operator. See the manufacturer page for kit contents.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Swing gates and kits

Cardin / BLGRIFFE24M

BLGRIFFE LCD master articulated arm



Manufacturer range image · confirm version

Articulated-arm operator for a swing gate on a narrow column. Integrated controller.

- 24 V DC motor · IP54
- Leaf up to 200 kg · standard length 2 m
- Arm included · max. 120° subject to layout

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Swing gates and kits

Cardin / BLGRIFFE24TM

BLGRIFFE master articulated arm



Manufacturer range image · confirm version

Articulated-arm operator for a swing gate on a narrow column. Integrated controller.

- 24 V DC motor · IP54
- Leaf up to 200 kg · standard length 2 m
- Arm included · max. 120° subject to layout

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Swing gates and kits

Cardin / KT-BLGRIFFE24

BLGRIFFE 24 V swing gate kit



Manufacturer range image · confirm version

Articulated arm set for two leaves, with master unit and slave operator.

- BLGRIFFE24M and BLGRIFFE24S
- 2 TXQ504C4 remotes · CDR999 photocells
- ICON beacon and CABPC10 cable per kit list

One operator is shown. Confirm kit contents in your quotation.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Control Access Distribution

Contents | Reference index | Request a quotation

Swing gates and kits

Cardin / HLXCORE230

HLXCORE 230 V underground operator



Manufacturer range image · confirm version

Underground swing gate operator. Select the casing and control unit for the site layout.

- 230 V AC motor · 470 W
- Leaf up to 3 m and 350 kg subject to application
- HLBOX range foundation boxes · select variant

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Swing gates and kits

Cardin / BLGRIFFE24S

BLGRIFFE · 24 V secondary geared motor



Manufacturer image · BLGRIFFE24S with articulated arm

Encoder-equipped electromechanical operator for the second leaf of a swing gate with a BLGRIFFE master.

- Self-locking 24 V drive
- Encoder control
- Compatible with BLGRIFFE24M and BLGRIFFE24TM masters
- Articulated arm shown; BLGRIFFEDRM straight arm available as an option

Confirm the pillar geometry and arm configuration when requesting a quote.

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Swing gates and kits

Cardin / HLXCORE24

HLXCORE · 24 V underground geared motor



Manufacturer image · HLXCORE24 operator only

Underground swing-gate operator with encoder. The foundation box conceals the drive below the gate leaf.

- 24 V DC supply, up to 400 Nm, IP67
- Standard opening up to 110°
- Leaf up to 3 m and 350 kg within manufacturer application limits
- Foundation box, controller and cable ordered separately

Opening up to 360° with ACCHLXCORE360, depending on configuration. Check foundation box and mounting compatibility.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Control Access Distribution

Contents | Reference index | Request a quotation

Up-and-over and sectional doors

Cardin / GLMECHA24M

GLMECHA master · 24 V



Manufacturer range image · confirm version

Master operator for a counterweighted up-and-over door. Select a suitable drive arm.

- 24 V motor · 120 W
- Integrated electronic control
- Select the drive arm separately

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Up-and-over and sectional doors

Cardin / GLMECHA230M

GLMECHA master · 230 V



Manufacturer range image · confirm version

Master operator for a counterweighted up-and-over door. Select a suitable drive arm.

- 230 V motor · 350 W
- Integrated electronic control
- Select the drive arm separately

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Up-and-over and sectional doors

Cardin / GLZACK600

GLZACK · 600 N sectional door operator



Manufacturer range image · confirm version

Sectional garage door operator with encoder and integrated light.

- Rated thrust 600 N
- 24 V DC motor · 9.6 m/min drive speed
- Select ZACK rail to match travel

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Up-and-over and sectional doors

Cardin / GLZACK1000

GLZACK · 1000 N sectional door operator



Manufacturer range image · confirm version

Sectional garage door operator with encoder and integrated light.

- Rated thrust 1000 N
- 24 V DC motor · 9.6 m/min drive speed
- Select ZACK rail to match travel

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Up-and-over and sectional doors

Cardin / GLMECHA24S

GLMECHA · 24 V secondary geared motor



Manufacturer image shared by GLMECHA 24/230 V secondary operators

Secondary operator for a counterbalanced up-and-over door requiring two motors. It complements the GLMECHA24M master.

- 24 V electromechanical motor
- Self-locking secondary operator
- Pairs with the GLMECHA24M master
- Drive arms ordered separately

Control Access Distribution

Choose the arms and twin-motor configuration to suit the existing door.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Rising barriers

Cardin / ELDOMS

ELDOM barrier · 3-5 m boom



Manufacturer range image · confirm version

Rising barrier cabinet with integrated controller, right or left handing and key release.

- 24 V DC motor · encoder position control
- Order 3-5 m boom separately
- Select a balancing spring to match the boom

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Rising barriers

Cardin / ELDOML

ELDOM barrier · 6-8 m boom



Manufacturer range image · confirm version

Rising barrier cabinet with integrated controller, right or left handing and key release.

- 24 V DC motor · encoder position control
- Order 6-8 m boom separately
- Select a balancing spring to match the boom

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Rising barriers

Cardin / ELSNAPS

SNAP · compact rising barrier

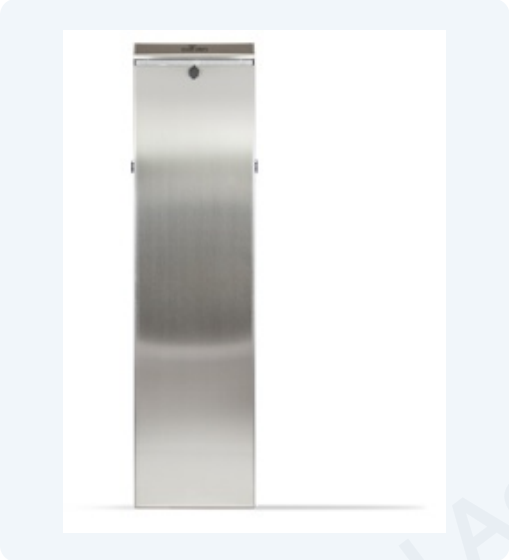

Manufacturer range image · confirm version

Rising barrier with integrated controller, spring balancing and manual release.

- 230 V AC mains supply
- SNAPPER3 or SNAPPER4 boom depending on requirements
- Select the boom and protective equipment

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Radio, control and safety

Cardin / TXQ504C4

S504 · 4-channel remote



Cardin image · TXQ504C4

Radio transmitter for a compatible S504 receiver. Check the installed receiver model.

- 433 MHz FM · rolling code
- 4 functions · 3 V CR2032 cell
- Shock-resistant case · retractable clip

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Radio, control and safety

Cardin / TXQ44940M

S449 · 4-function remote



Manufacturer range image · confirm version

Compact radio transmitter for S449 systems. Check frequency and protocol before replacement.

- 433 MHz · rolling code
- 4 functions
- 3 V CR2032 lithium cell

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Radio, control and safety

Cardin / SAFEPRC4

Radioshield · safety edge interface



Cardin image · SAFEPRC4

Transceiver interface for a moving safety edge. Pair with the fixed receiver unit.

- 433 MHz · 30 m rated maximum radio range
- NC / 8.2 kΩ input
- 3 V lithium battery · IP65

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Radio, control and safety

Cardin / UNICO500MF

UNICO · Programmable remote control



Manufacturer image · UNICO500MF

Two-way remote for centralising radio controls and setting up groups, events and scenarios.

- Up to 100 programmable functions
- 433/868 MHz multi-frequency radio
- Rechargeable 3.7 V Li-poly battery
- Digital display and USB-C cable included

Control Access Distribution

Check the receiver series and supported functions before setup.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Radio, control and safety

Cardin / TXWALL500MFB

TXWALL · Battery-powered wall radio control



Manufacturer image shared across TXWALL controls

Two-way wall control for several Cardin devices using four configurable buttons.

- 3 V battery supply
- Four individually configurable buttons
- 433/868 MHz multi-frequency radio, S400 and S500 series
- Fits 503 or round two-module wall boxes, 60 mm centres

Control Access Distribution

Battery-powered version. Check the wall box and receivers when selecting the unit.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Radio, control and safety

Cardin / TXWALL500MFL

TXWALL · Externally powered wall radio control



Manufacturer image shared across TXWALL controls

Externally powered two-way wall control. Its four buttons can operate different Cardin radio devices.

- External 12 V DC supply
- Four individually configurable buttons
- 433/868 MHz multi-frequency radio, S400 and S500 series
- Fits 503 or round two-module wall boxes, 60 mm centres

Provide a 12 V DC supply and check receiver compatibility.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Control Access Distribution

Radio, control and safety

Cardin / CDR-REDS2.0

CDR-REDS · 2 m dynamic infrared light curtain



Manufacturer image of the CDR-REDS range

Two infrared-beam profiles for obstacle detection on industrial sectional doors.

- 20 beams over 1,970 mm, up to 12 m range
- IP67 and 12-30 V DC supply
- Dynamic blanking with sequential beam masking
- NC output, 15 m transmitter and 5 m receiver cables

Control Access Distribution

Check positioning, wiring and the complete door’s protective measures against the instructions.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Radio, control and safety

Cardin / CDR-REDSL2.0

CDR-REDSL · 2 m static infrared light curtain



Manufacturer image of the CDR-REDSL range

Two infrared-beam profiles for obstacle detection on sliding gates and openings with unusual dimensions.

- 42 beams over 1,970 mm, 45 mm spacing
- Up to 12 m range, IP67, 12-30 V DC supply
- Static blanking to mask beams at the top or bottom
- NC/NO outputs, 15 m transmitter and 5 m receiver cables

Control Access Distribution

Check wiring and protected zones for the actual opening configuration.

Price on request

Confirm configuration and pricing in your quotation.

Manufacturer catalogue FR | Manufacturer catalogue EN | Technical documentation | Request a quotation

Technical guidance

Choose an operator

Provide the opening type, dimensions, weight and duty cycle of the gate or door.
Confirm operator limits, accessories and installation safeguards.

Manufacturer resource

Prepare a 4G installation

Specify the site, available mobile network, readers, outputs and requested service.
Treat CARHF4G, CARHF4G-10 and commercial configuration CARHF4G1V as separate items.

Manufacturer resource

Check radio compatibility

Provide the installed transmitter and receiver models, frequency and access management requirements.
Check the series and protocol as well as the frequency.

Manufacturer resource

Control Access Distribution

Contents | Reference index | Request a quotation

Prepare your quotation

1. Identify the access

State the access type, dimensions, movements per day and site conditions. Attach a dimensioned plan and photographs if available.

2. Specify the equipment

State the reference, dimensions, power supply, control mode and required protective devices.

3. Confirm the price excluding VAT

Confirm the variant, supplied items, installation conditions and price in your quotation.

Control Access Distribution

Cardin resources

Manufacturer resource 1

Manufacturer resource 2

Manufacturer resource 3

The quotation specifies the equipment, accessories and services required for the project.

Ask ControlAccessPro for a quotation