Contents | Reference index | Request a quotation

PROFESSIONAL SELECTION 2027 / 2028

Motorline

Gate operators, industrial doors and safety



MF2020



KIT GALO600



TELICA

32 selected references and configurations for the European market.

Clickable contents, manufacturer resources and quotation links.

Choose a product family | Plan my project

Control Access Distribution

Contents | Reference index | Request a quotation

Contents

Choose by installation p. 3
Reference index p. 4
Detection and protection p. 5
Sliding gates p. 11
Swing gates p. 16
Sectional and high-speed doors p. 20
Barriers and traffic control p. 29
Controllers and remote operation p. 32
Technical guidance p. 37
Prepare a quotation and view sources p. 38

Control Access Distribution

Each line opens its chapter. The Contents button remains available on every page.

Contents | Reference index | Request a quotation

Choose by installation

32 product sheets for industrial doors, gates and access control. Other references and configurations on request.

Control Access Distribution

Detection and protection

View product sheets

Sliding gates

View product sheets

Swing gates

View product sheets

Sectional and high-speed doors

View product sheets

Barriers and traffic control

View product sheets

Controllers and remote operation

View product sheets

Contents | Reference index | Request a quotation

Reference index

CHAINLIFT	p. 31	MC200KVM	p. 33
ECO PLUS	p. 28	MC60	p. 34
EF70	p. 9	MC62	p. 35
EF70R	p. 10	MC91BL-SC	p. 32
FORT-BL	p. 14	MCONNECT LINK	p. 36
KIT GALO2200	p. 12	MF2020	p. 5
KIT GALO600	p. 11	MF30	p. 6
KIT GALO600 SPEED	p. 13	MF40	p. 7
KVM105	p. 20	MR65	p. 8
KVM110	p. 21	PUMA	p. 17
KVM115	p. 22	ROSSO PRO	p. 27
KVM25	p. 26	SIGMA BL	p. 29
KVM305	p. 23	STARK	p. 15
KVM310	p. 24	SUBWING	p. 19
KVM315	p. 25	TELICA	p. 16
LINCE	p. 18	ZUMA BL	p. 30

Click an ordering reference to open its product sheet.

Control Access Distribution

Contents | Reference index | Request a quotation

Detection and protection

Motorline / MF2020

Infrared safety light curtain



Official Motorline product image.

For high-speed doors, sectional doors and powered shutters.

- Transmitter and receiver columns, sensing height up to 2.5 m.
- Two ranges depending on version, 1 to 5 m or 5 to 10 m.
- 12-24 V DC supply, IP67 and three operating modes.

Control Access Distribution

Select column height, range and the controller test connection.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Detection and protection

Motorline / MF30

Photocell pair



Official Motorline product image.

Access detection or protection equipment.

- Modulated infrared transmitter and receiver.
- Single beam for point detection.
- Stated nominal range of 25 m.

Confirm controller compatibility and mounting layout.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Control Access Distribution

Contents | Reference index | Request a quotation

Detection and protection

Motorline / MF40

Adjustable photocells



Official Motorline range image.

Access detection or protection equipment.

- Single beam, 2 to 40 m range.
- 12 or 24 V AC/DC supply.
- 180° horizontal and 10° vertical adjustment, IP54.

Control Access Distribution

Specifications for MF40. LED and battery versions are separate models.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Detection and protection

Motorline / MR65

Industrial door radar



Official Motorline product image.

Access detection or protection equipment.

- Stated mounting height up to 6.5 m.
- Adjustable directional detection for the application.
- Manufacturer-rated IP65 enclosure.

Control Access Distribution

Confirm detection coverage and functions with the controller.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Detection and protection

Motorline / EF70

Electromagnetic lock



Official Motorline product image.

Access detection or protection equipment.

- Stated holding force of 70 kg.
- 12 to 24 V DC supply.
- Fit with a suitable armature.

Control Access Distribution

Confirm fixing and wiring against the EF70 manual.

€58.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Detection and protection

Motorline / EF70R

EF70R electromagnetic lock



Official Motorline product image.

Access detection or protection equipment.

- Stated holding force of 70 kg.
- 12 to 24 V DC supply.
- EF70R is separately documented by Motorline.

Control Access Distribution

Use the EF70R manual to confirm mounting.

€58.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sliding gates

Motorline / KIT GALO600

600 kg brushless kit



Official Motorline range image.

Automation for a sliding gate.

- For gates up to 600 kg, 260 W rated.
- 36 V DC motor, digital encoder and MC91BL-SC controller.
- Catalogue kit with 2 FALK remotes, MF30 photocells and transformer.

Control Access Distribution

Manual states 214 mm/s at maximum load. Confirm the kit configuration.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Sliding gates

Motorline / KIT GALO2200

2,200 kg brushless kit



Official Motorline range image.

Automation for a sliding gate.

- For gates up to 2,200 kg, 430 W rated.
- 36 V DC motor, digital encoder and MC91BL-SC controller.
- Catalogue kit with 2 FALK remotes, MF30 photocells and transformer.

Control Access Distribution

Manual states 260 mm/s at maximum load. Confirm the kit configuration.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sliding gates

Motorline / KIT GALO600 SPEED

600 kg high-speed brushless kit



Official Motorline range image.

Automation for a sliding gate.

- For gates up to 600 kg, 360 W rated.
- 36 V DC motor with MC91BL-SC controller and encoder.
- Manual states 400 mm/s at maximum load.

Validate speed and protective devices for the gate and site.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Control Access Distribution

Contents | Reference index | Request a quotation

Sliding gates

Motorline / FORT-BL

Compact brushless drive



Official Motorline product image.

Automation for a sliding gate.

- For sliding gates up to 500 kg.
- 36 V DC, 260 W motor and aluminium housing.
- Integrated RGB lamp and adjustable pinion height.

Confirm rack, accessories and version in the quotation.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Control Access Distribution

Contents | Reference index | Request a quotation

Sliding gates

Motorline / STARK

Heavy sliding-gate drive



Official Motorline product image.

Automation for a sliding gate.

- STARK4, STARK6 and STARK8 versions.
- Stated maximum gate masses of 4,000, 6,000 or 8,000 kg.
- Variable-frequency controller with adjustable speed.

Control Access Distribution

Size for gate mass, rolling resistance and operating duty.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Swing gates

Motorline / TELICA

Articulated-arm gate operator



Official Motorline product image.

Automation for a swing gate.

- For leaves up to 2.5 m, depending on configuration.
- 230 V AC and 24 V DC versions.
- Articulated arm in the TELICA configuration.

Check mounting geometry and pier compatibility.

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Swing gates

Motorline / PUMA

24 V swing-gate linear actuator



Official Motorline product image.

Automation for a swing gate.

- 24 V DC, 50 W motor.
- 400 mm stroke and leaves up to 2 m.
- IP54, residential use per Motorline.

Confirm fixings and mounting geometry.

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Swing gates

Motorline / LINCE

Linear actuator range



Official Motorline product image.

Automation for a swing gate.

- 300, 400 or 600 mm stroke, depending on model.
- 24 V DC, 110 V AC and 230 V AC versions.
- Designed for swing-gate automation.

Control Access Distribution

Select stroke, voltage and model for the gate leaf.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Swing gates

Motorline / SUBWING

Underground gate operator



Official Motorline product image.

Automation for a swing gate.

- For leaves up to 2.5 m, depending on configuration.
- 110 or 230 V AC and 24 V DC versions.
- Underground installation tailored to gate geometry.

Confirm foundation box, drainage and emergency release.

Control Access Distribution

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sectional and high-speed doors

Motorline / KVM105

70 Nm sectional door drive



Official Motorline range image.

Solution for sectional or high-speed doors, depending on model.

- 70 Nm torque and door area up to 20 m².
- 230 V, 50 Hz supply. Gearbox speed 24 rpm.
- 25.4 mm bore, emergency chain and IP54.

Control Access Distribution

Confirm door balance, shaft and operating duty.

€620.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sectional and high-speed doors

Motorline / KVM110

120 Nm sectional door drive



Official Motorline range image.

Solution for sectional or high-speed doors, depending on model.

- 120 Nm torque and door area up to 40 m².
- 230 V, 50 Hz supply. Gearbox speed 24 rpm.
- 25.4 mm bore, emergency chain and IP54.

Control Access Distribution

Confirm door balance, shaft and operating duty.

€680.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sectional and high-speed doors

Motorline / KVM115

150 Nm sectional door drive



Official Motorline range image.

Solution for sectional or high-speed doors, depending on model.

- 150 Nm torque and door area up to 50 m².
- 400 V, 50 Hz supply. Gearbox speed 24 rpm.
- 25.4 mm bore, emergency chain and IP54.

Confirm door balance, shaft and operating duty.

€750.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Control Access Distribution

Sectional and high-speed doors

Motorline / KVM305

Sectional drive for up to 20 m²



Official Motorline range image.

Solution for sectional or high-speed doors, depending on model.

- For sectional doors up to 20 m².
- 230 V, 50 Hz supply, published power 430 W.
- 25.4 mm bore, stated speed range 12 to 32 rpm.

Control Access Distribution

Check sizing and controller against the manual.

€690.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sectional and high-speed doors

Motorline / KVM310

Sectional drive for up to 28 m²



Official Motorline range image.

Solution for sectional or high-speed doors, depending on model.

- For sectional doors up to 28 m².
- 230 V, 50 Hz supply, published power 600 W.
- 25.4 mm bore, stated speed range 12 to 32 rpm.

Control Access Distribution

Check sizing and controller against the manual.

€765.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Sectional and high-speed doors

Motorline / KVM315

Sectional drive for up to 40 m²



Official Motorline range image.

Solution for sectional or high-speed doors, depending on model.

- For sectional doors up to 40 m².
- 230 V, 50 Hz supply, published power 900 W.
- 25.4 mm bore, stated speed range 12 to 32 rpm.

Control Access Distribution

Check sizing and controller against the manual.

€790.50 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sectional and high-speed doors

Motorline / KVM25

Compact sectional door drive



Official Motorline product image.

Solution for sectional or high-speed doors, depending on model.

- For sectional doors up to 12 m².
- Direct shaft drive, 24 V DC and 13 Nm.
- MC60KVM controller with output for EF25 lock.

Confirm the shaft and door balance.

Control Access Distribution

€410.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Sectional and high-speed doors

Motorline / ROSSO PRO

Garage-door operator

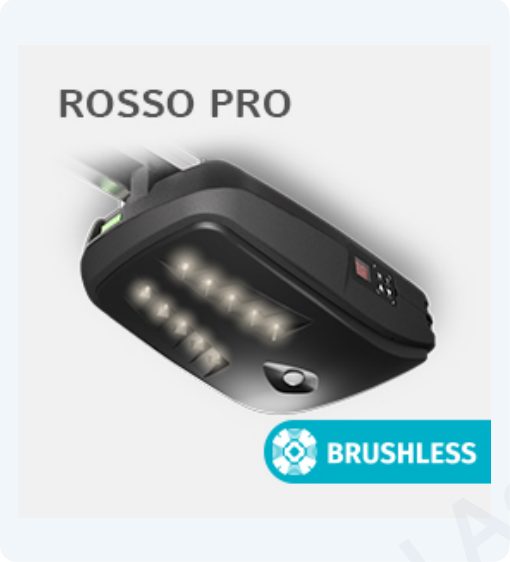

Official Motorline product image.

Solution for sectional or high-speed doors, depending on model.

- For sectional garage doors with a compatible rail.
- External programming display.
- Integrated radio receiver, depending on version.

Control Access Distribution

Confirm rail, travel and radio frequency of the version.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Sectional and high-speed doors

Motorline / ECO PLUS

High-speed roll-up door



Official Motorline product image.

Solution for sectional or high-speed doors, depending on model.

- Designed for low air-pressure areas.
- 750 W three-phase drive and aluminium cover.
- Manufacturer configuration includes MF2020 columns.

Control Access Distribution

Specify opening size, curtain and site conditions in the quotation.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Barriers and traffic control

Motorline / SIGMA BL

Brushless boom barrier



Official Motorline product image.

Equipment for controlling vehicle access.

- 36 V DC brushless motor, 300 W.
- Boom up to 6 m, depending on configuration.
- MC90BL-BR-36V controller, RGB LED and IP54.

Control Access Distribution

Specify boom, detection devices and support.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Barriers and traffic control

Motorline / ZUMA BL

Swing-away boom barrier



Official Motorline product image.

Equipment for controlling vehicle access.

- 36 V DC brushless motor and IP54.
- Boom up to 6 m, depending on configuration.
- Swing-away boom mechanism, subject to specified installation.

Control Access Distribution

Confirm boom version, detection and return-to-service requirements.

Price on request

Confirm configuration and pricing in your quotation.

French source | Manufacturer EN | Technical documentation | Request a quotation

Barriers and traffic control

Motorline / CHAINLIFT

Motorised chain barrier



Official Motorline product image.

Equipment for controlling vehicle access.

- Two powered pillars, with 8 m chain in the specified kit.
- 230 V AC or 24 V DC drive, depending on version.
- Manufacturer set includes controller, remotes and photocells.

Control Access Distribution

Confirm opening width, mounting and supplied items in the quotation.

€1,838.50 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Controllers and remote operation

Motorline / MC91BL-SC

Brushless sliding-gate controller



Official Motorline product image.

Controller or interface for compatible automation.

- Designed for brushless sliding-gate motors.
- Integrated radio control receiver.
- Motorline states compatibility with MCONNECT LINK.

Control Access Distribution

Confirm the board revision and compatible drive.

€121.50 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Controllers and remote operation

Motorline / MC200KVM

KVM variable-frequency control box



Official Motorline product image.

Controller or interface for compatible automation.

- 230 V controller with integrated variable-frequency drive.
- For 230 V three-phase KVM205, KVM210 and KVM215 motors.
- Control box for connection per the manual.

Control Access Distribution

Confirm the motor version and required accessories.

€315.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Controllers and remote operation

Motorline / MC60

Controller for one 24 V motor



Official Motorline product image.

Controller or interface for compatible automation.

- Controls one 24 V DC motor up to 120 W.
- Encoder or limit-switch operation depending on installation.
- Inputs for two photocell pairs.

Control Access Distribution

Confirm controller revision and compatibility.

€89.50 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Contents | Reference index | Request a quotation

Controllers and remote operation

Motorline / MC62

Controller for one or two motors



Official Motorline product image.

Controller or interface for compatible automation.

- For one or two 24 V DC motors.
- Maximum power 120 W per motor.
- Inputs for two photocell pairs.

Control Access Distribution

Check the revision, inputs and wiring against the manual.

€116.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Controllers and remote operation

Motorline / MCONNECT LINK

Wi-Fi interface for controllers



Official Motorline product image.

Controller or interface for compatible automation.

- Connects to compatible Motorline control boards.
- Remote diagnostics, history and transmitter management.
- Technical settings and updates depend on the control board.

Control Access Distribution

Confirm board compatibility and Wi-Fi coverage.

€58.00 excl. VAT

Indicative CAD public price · 07.11.2026. Contact us.

French source | Manufacturer EN | Technical documentation | Request a quotation

Technical guidance

Sizing the MF2020

Choose a column height of 1,425, 1,825, 2,225 or 2,625 mm and a 1-5 m or 5-10 m range.
Check sensing height, mode and test input against the version-specific manual.

Manufacturer resource

Choosing a GALO kit

The 600, 600 SPEED and 2200 versions differ in gate mass, power and loaded speed.
Specify gate mass, travel, duty, supply, rack and protective devices.

Manufacturer resource

Control Access Distribution

Contents | Reference index | Request a quotation

Prepare your quotation

1. Identify the access

State the access type, dimensions, movements per day and site conditions. Attach a dimensioned plan and photographs if available.

2. Specify the equipment

State the reference, dimensions, power supply, control mode and required protective devices.

3. Confirm the price excluding VAT

Confirm the variant, supplied items, installation conditions and price in your quotation.

Control Access Distribution

Motorline resources

Manufacturer resource 1 | Manufacturer resource 2

Manufacturer resource 3 | Manufacturer resource 4

The quotation specifies the equipment, accessories and services required for the project.

Ask ControlAccessPro for a quotation

Control Access Distribution · 326 avenue de la Rasclave · 13821 La Penne-sur-Huveaune · France

cad@controlaccessdistri.com +33 4 91 18 82 68 controlaccesspro.com

Indicative public prices excl. VAT. Please contact us. Manufacturer images.